

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
16 October 2003 (16.10.2003)

PCT

(10) International Publication Number  
**WO 03/085813 A2**

(51) International Patent Classification<sup>7</sup>: **H02M**  
(21) International Application Number: **PCT/US03/10013**  
(22) International Filing Date: **2 April 2003 (02.04.2003)**  
(25) Filing Language: **English**  
(26) Publication Language: **English**  
(30) Priority Data: **04 Oct 04**  
**60/370,072** **4 April 2002 (04.04.2002)** **US**  
(71) Applicant (for all designated States except US): **THOMSON LICENSING S.A.** [US/US]; 2 Independence Way - Suite 2, Princeton, NJ 08540 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MUTERSPAUGH, Max, Ward** [US/US]; 7353 North Layman Avenue, Indianapolis, IN 46250 (US).


Published:

— without international search report and to be republished upon receipt of that report

(74) Agents: **TRIPOLI, Joseph, S.** et al.; c/o Thomson Licensing Inc., 2 Independence Way - Suite 2, Princeton, NJ 08540 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **LINE FREQUENCY SWITCHING REGULATOR**

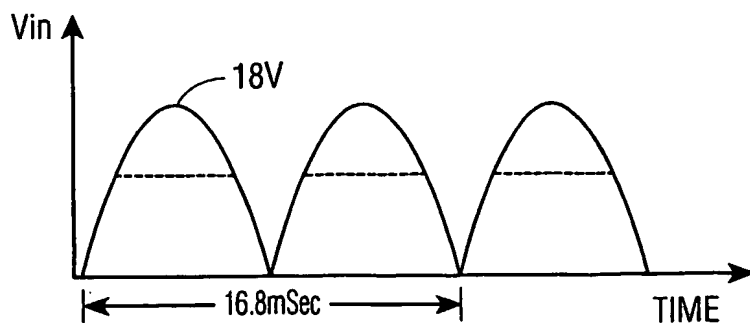

(57) Abstract: In a switch mode power supply (SMPS), a mains supply voltage source is coupled to a rectifier for producing an input supply voltage. The rectified input supply voltage is coupled unfiltered to an input of the SMPS. A switching power transistor having a controllable duty cycle is controlled by a duty cycle modulated signal for producing a regulated output supply voltage from the rectified input supply voltage. The periodic waveform of the mains supply voltage is used to establish the timings of the duty cycle modulated signal. In each cycle, current flow is initiated in the transistor, when the transistor is already fully

turned on and a voltage developed between its main current conducting terminals is low or close to zero volts. Thereby, power dissipation is, advantageously, small. When the output supply voltage attains the required level the transistor is turned off. Hysteresis is provided for preventing the transistor from turning on again in the same cycle, after it has been turned off.